



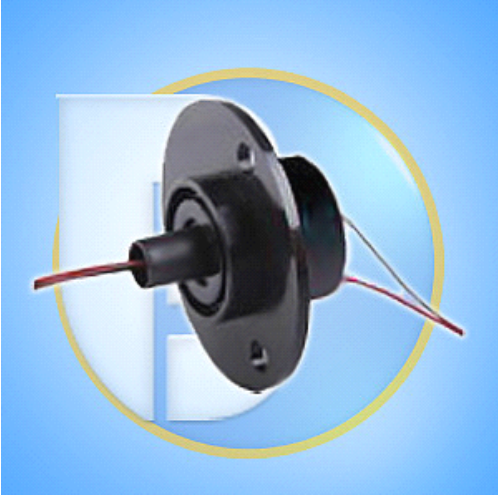

Though hole slip ring---BLH0422

Specification		www.chineseslipring.com
Basic Parameters:		
Through Bore Diameter	Φ4mm	
Circuits	Standard 1-8 circuits	
Operating Speed	500 rpm	
Working Temperature	-40°C~+80°C	
Working Humidity	60%RH or higher	
Electrical:		
Voltage Rating	380VAC/DC	<p>Option</p> <ul style="list-style-type: none"> • Operating speed • Circuits • Signal, power combined • Current & Voltage • Lead wire length • Lead wire exit direction • Protection class • Connector
Current Rating	2A per circuit or combination	
Dielectric Strength	≥500 VAC@50Hz between per circuit	
Insulation Resistance	500 MΩ@500VDC	
Electronic Noise	≤8mΩ	
Mechanical:		
Contact Material	Precious metal	
Lead Wire Size	26AWG, Tinning Teflon, ULR	
Lead Wire Length	standard 300 mm	
Housing Material	Aluminum alloy	
Torque	≤9.25 g · m	
Protection Grade	IP54 or higher	
Others:		

MODEL:BLH0422

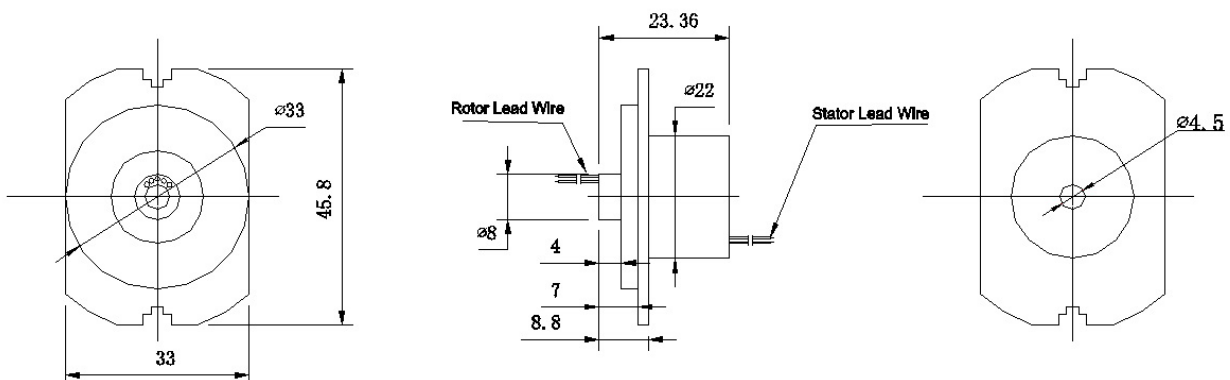

Unit:mm