




Though hole slip ring---BLH0932

Specification		www.buildre.net	
Basic Parameters:			
Through Bore Diameter	Φ9mm		
Circuits	Standard 1-18 circuits		
Operating Speed	500 rpm		
Working Temperature	-40°C~+80°C		
Working Humidity	60%RH or higher		
Electrical:			
Voltage Rating	380VAC/DC		
Current Rating	2A per circuit or combination		
Dielectric Strength	≥500 VAC@50Hz between per circuit		
Insulation Resistance	500 MΩ@500VDC		
Electronic Noise	≤8mΩ		
Mechanical:			
Contact Material	Precious metal	<p>Option</p> <ul style="list-style-type: none"> • Operating speed • Circuits • Signal, power combined • Current & Voltage • Lead wire length • Lead wire exit direction • Protection class • Connector 	
Lead Wire Size	22AWG, Tinning Teflon, ULR		
Lead Wire Length	standard 300 mm		
Housing Material	Aluminum alloy		
Torque	≤9.25 g · m		
Protection Grade	IP54 or higher		
Others:			

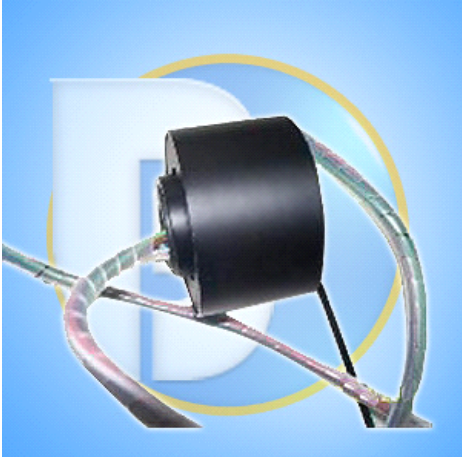