



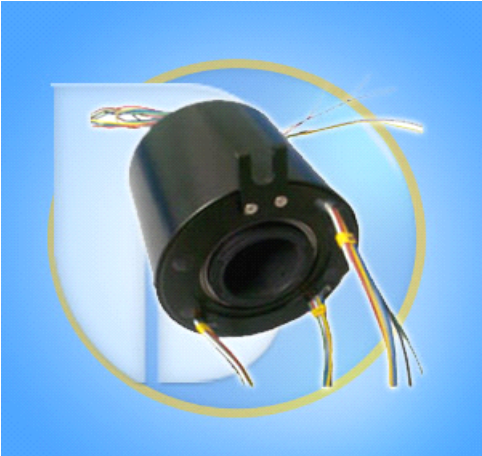

Though hole slip ring---BLH1235

Specification		www.chineseslipring.com
Basic Parameters:		
Through Bore Diameter	Φ 12.7mm	
Circuits	Standard 1-18 circuits	
Operating Speed	500 rpm	
Working Temperature	-40℃~+100℃	
Working Humidity	60%RH or higher	
Electrical:		
Voltage Rating	380VAC/DC	<p style="text-align: center;">Option</p> <ul style="list-style-type: none"> ● Operating speed ● Circuits ● Signal, power combined ● Current & Voltage ● Lead wire length ● Lead wire exit direction ● Protection class ● Connector
Current Rating	2A per circuit or combination ≥500 VAC@50Hz between per circuit	
Dielectric Strength	500 MΩ@500VDC	
Insulation Resistance	≤8mΩ	
Electronic Noise	Precious metal	
Mechanical:		
Contact Material	22AWG, Tinning Teflon, ULR	
Lead Wire Size	standard 300 mm	
Lead Wire Length	Aluminum alloy	
Housing Material	≤9.25 g · m	
Torque	IP54 or higher	
Protection Grade	Others:	

MODEL : BLH1235

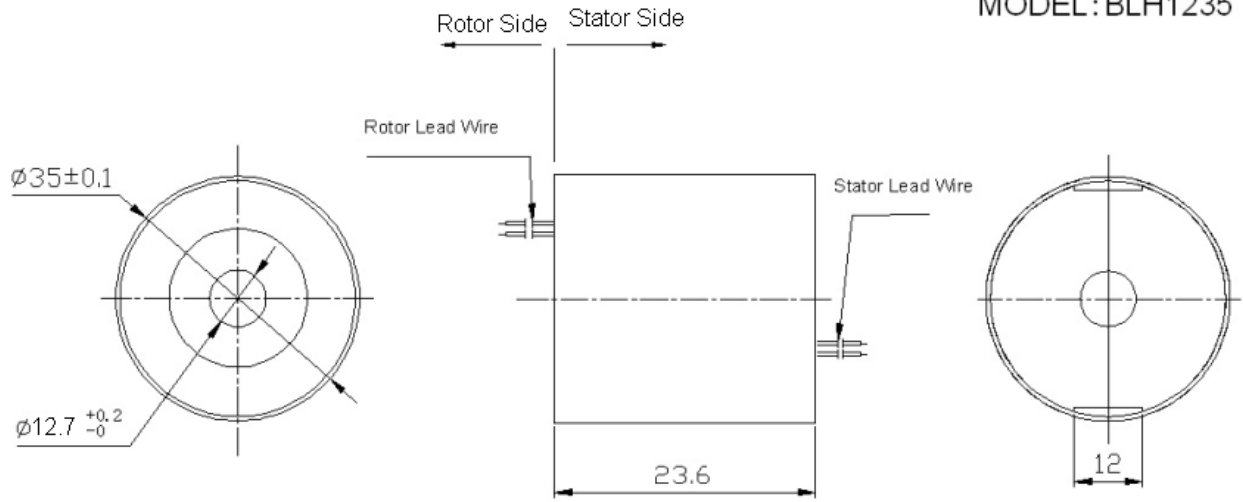

Unit:mm