



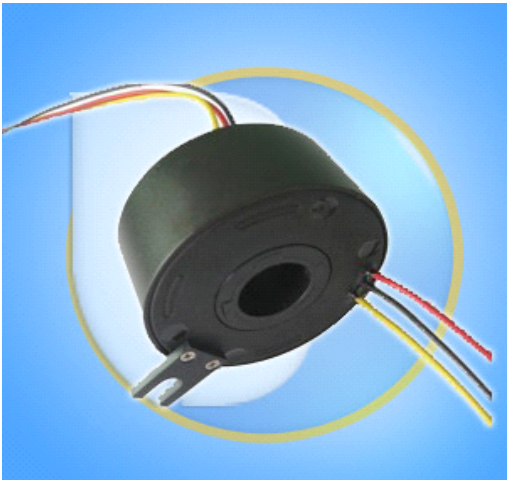

## Though hole slip ring---BLH60130

Specification		www.chineseslipring.com	
<b>Basic Parameters:</b>			
Through Bore Diameter	Φ60mm		
Circuits	Standard 1-36 circuits		
Operating Speed	600 rpm		
Working Temperature	-40°C~+120°C		
Working Humidity	60%RH or higher		
<b>Electrical:</b>			
Voltage Rating	360VAC/DC	<p>Option</p> <ul style="list-style-type: none"> <li>● Operating speed</li> <li>● Circuits</li> <li>● Signal, power combined</li> <li>● Current &amp; Voltage</li> <li>● Lead wire length</li> <li>● Lead wire exit direction</li> <li>● Protection class</li> <li>● Connector</li> </ul>	
Current Rating	2A ,15A,20A per circuit or combination		
Dielectric Strength	≥1000 VAC@50Hz between per circuit		
Insulation Resistance	1000 MΩ@500VDC		
Electronic Noise	≤8mΩ		
<b>Mechanical:</b>			
Contact Material	Precious metal		
Lead Wire Size	22AWG,17AWG, 14AWG Tinning Teflon, ULR		
Lead Wire Length	standard 300 mm		
Housing Material	Aluminum alloy		
Torque	≤9.25 g · m		
Protection Grade	IP54 or higher		
<b>Others:</b>			

MODEL:BLH60130

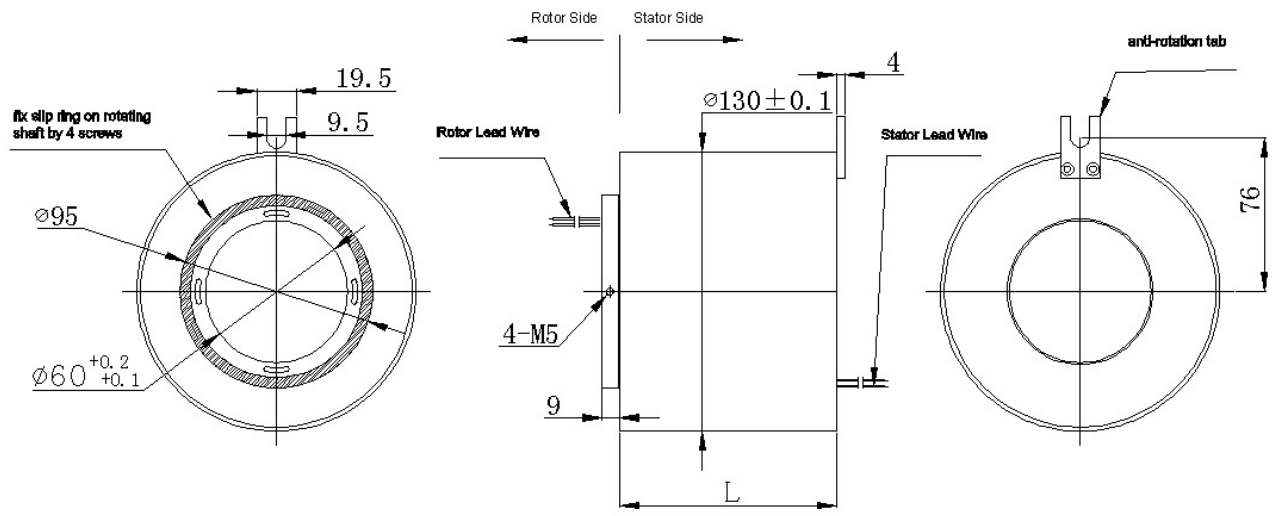

Unit:mm