




## Though hole slip ring---BLH70150

Specification		www.chineseslipring.com	
<b>Basic Parameters:</b>			
Through Bore Diameter	Φ 70mm		
Circuits	Standard 1-36 circuits		
Operating Speed	600 rpm		
Working Temperature	-40℃~+120℃		
Working Humidity	60%RH or higher		
<b>Electrical:</b>			
Voltage Rating	380VAC/DC		
Current Rating	5A, 10A, 15A, 20A per circuit or combination		
Dielectric Strength	≥1000 VAC@50Hz between per circuit		
Insulation Resistance	1000 MΩ@500VDC		
Electronic Noise	≤8mΩ		
<b>Mechanical:</b>			
Contact Material	Precious metal	<p>Option</p> <ul style="list-style-type: none"> <li>● Operating speed</li> <li>● Circuits</li> <li>● Signal, power combined</li> <li>● Current &amp; Voltage</li> <li>● Lead wire length</li> <li>● Lead wire exit direction</li> <li>● Protection class</li> <li>● Connector</li> </ul>	
Lead Wire Size	22AWG, 17AWG, 14AWG Tinning Teflon, ULR		
Lead Wire Length	standard 300 mm		
Housing Material	Aluminum alloy		
Torque	≤9.25 g · m		
Protection Grade	IP54 or higher		
<b>Others:</b>			

# MODEL:BLH70150

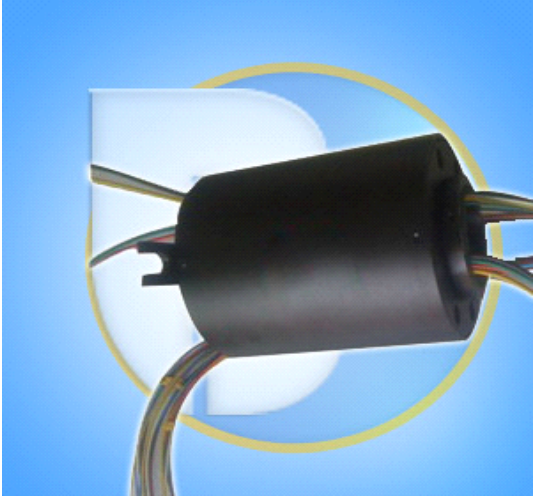