




Though hole slip ring---BLH80158

Specification		www.chineseslipring.com	
Basic Parameters:			
Through Bore Diameter	Φ60mm		
Circuits	Standard 1-36 circuits		
Operating Speed	600 rpm		
Working Temperature	-40℃~+120℃		
Working Humidity	60%RH or higher		
Electrical:			
Voltage Rating	380VAC/DC		
Current Rating	5A,10A,15A,20A per circuit or combination		
Dielectric Strength	≥1000 VAC@50Hz between per circuit		
Insulation Resistance	1000 MΩ@500VDC		
Electronic Noise	≤8mΩ		
Mechanical:			
Contact Material	Precious metal	<p style="text-align: center;">Option</p> <ul style="list-style-type: none"> ● Operating speed ● Circuits ● Signal, power combined ● Current & Voltage ● Lead wire length ● Lead wire exit direction ● Protection class ● Connector 	
Lead Wire Size	22AWG,17AWG, 14AWG Tinning Teflon, ULR		
Lead Wire Length	standard 300 mm		
Housing Material	Aluminum alloy		
Torque	≤9.25 g · m		
Protection Grade	IP54 or higher		
Others:			

MODEL:BLH80158

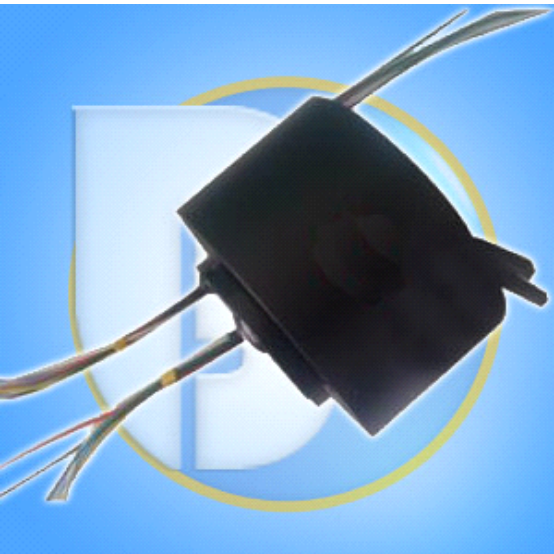