



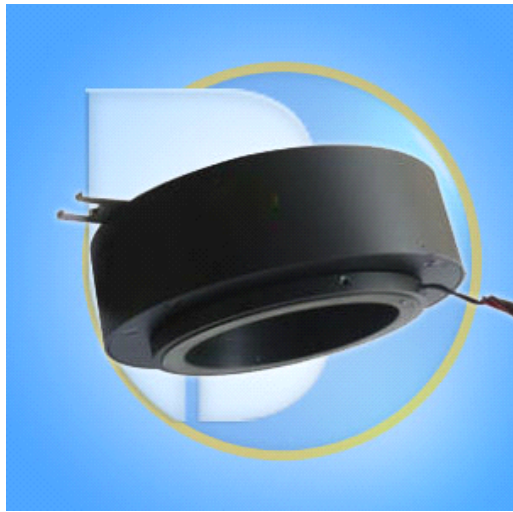

## Though hole slip ring---BLH120215

Specification		www.chineseslipring.com
<b>Basic Parameters:</b>		 <p style="text-align: center;">Option</p> <ul style="list-style-type: none"> <li>● Operating speed</li> <li>● Circuits</li> <li>● Signal, power combined</li> <li>● Current &amp; Voltage</li> <li>● Lead wire length</li> <li>● Lead wire exit direction</li> <li>● Protection class</li> <li>● Connector</li> </ul>
Through Bore Diameter	Φ 120mm	
Circuits	Standard 1-36 circuits	
Operating Speed	600 rpm	
Working Temperature	-40℃~+120℃	
Working Humidity	60%RH or higher	
<b>Electrical:</b>		
Voltage Rating	380VAC/DC	
Current Rating	5A, 10A, 15A, 20A per circuit or combination	
Dielectric Strength	≥1000 VAC@50Hz between per circuit	
Insulation Resistance	1000 MΩ@500VDC	
Electronic Noise	≤8mΩ	
<b>Mechanical:</b>		
Contact Material	Precious metal	
Lead Wire Size	22AWG, 17AWG, 14AWG Tinning Teflon, ULR	
Lead Wire Length	standard 300 mm	
Housing Material	Aluminum alloy	
Torque	≤9.25 g · m	
Protection Grade	IP54 or higher	
<b>Others:</b>		

MODEL:BLH120215

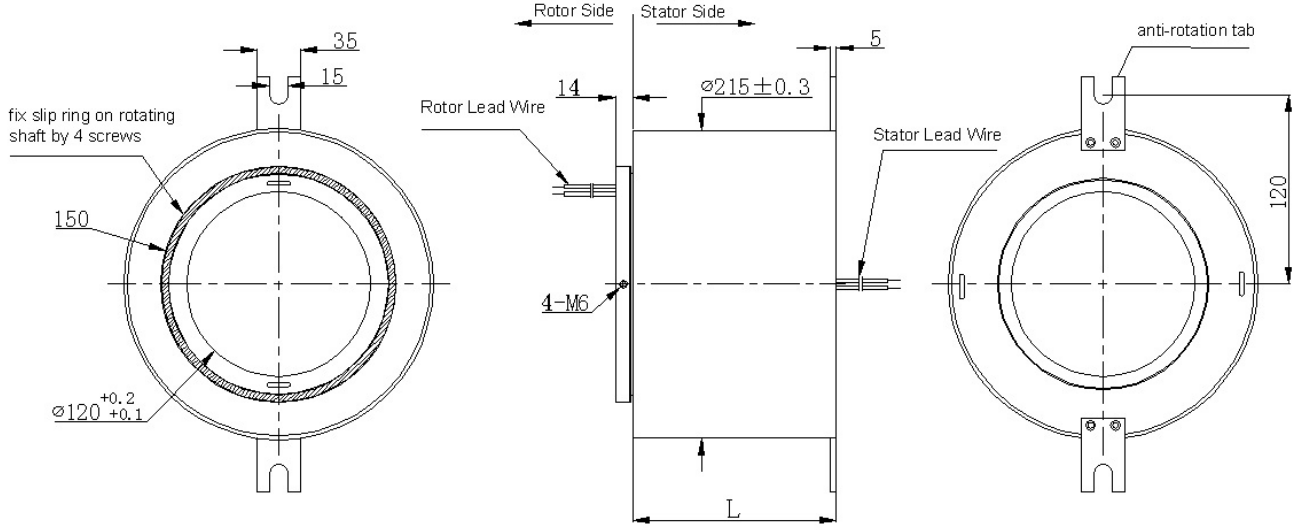

Unit: mm