


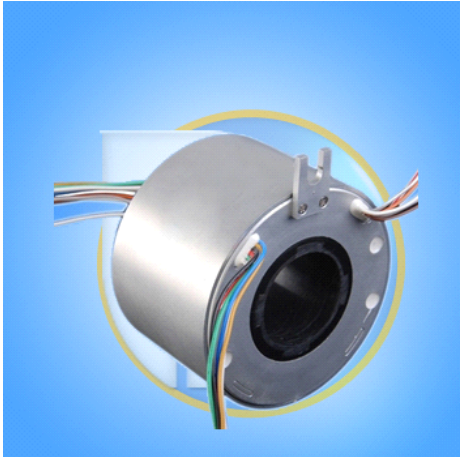

Though hole slip ring---BLH50120

Specification		www.chineseslipring.com
Basic Parameters:		 <p>Option</p> <ul style="list-style-type: none"> • Operating speed • Circuits • Signal, power combined • Current & Voltage • Lead wire length • Lead wire exit direction • Protection class • Connector
Through Bore Diameter	Φ 50mm	
Circuits	Standard 1-24 circuits	
Operating Speed	1000 rpm	
Working Temperature	-40℃~+120℃	
Working Humidity	60%RH or higher	
Electrical:		
Voltage Rating	380VAC/DC	
Current Rating	2A ,5A,10A,15A,20A per circuit or combination	
Dielectric Strength	≥1000 VAC@50Hz between per circuit	
Insulation Resistance	1000 MΩ@500VDC	
Electronic Noise	≤8mΩ	
Mechanical:		
Contact Material	Precious metal	
Lead Wire Size	22AWG,17AWG, 14AWG Tinning Teflon, ULR	
Lead Wire Length	standard 300 mm	
Housing Material	Aluminum alloy	
Torque	≤9.25 g · m	
Protection Grade	IP54 or higher	
Others:		

Model	Length “L”				
	Current	6 circuits	12 circuits	18circuits	24circuits
BLH50120	L(02A/05A)	50	69.8	89.6	109.4

	L(10A)	54.2	78.2	102.2	126.2
	L(15A/20)	59	87.8	116.6	145.4

MODEL: BLH50120

